


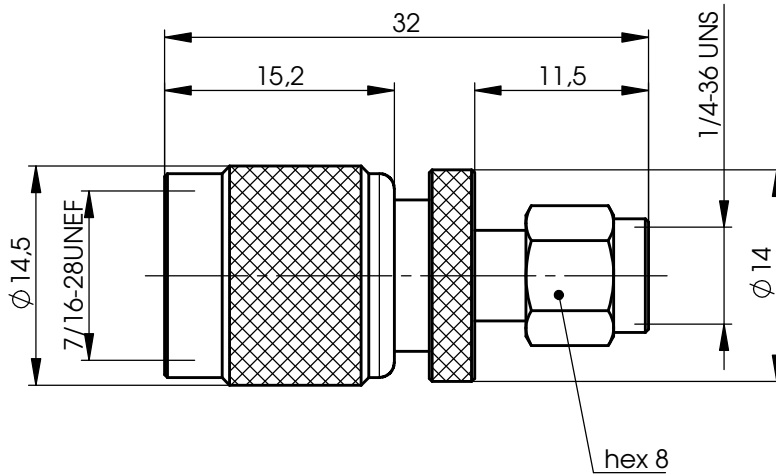

Mechanical characteristics

interface dimensions acc. to mating life
coupling torque

Components

center contact
outer contact
insulator

Electrical characteristics

impedance
frequency
return loss

working voltage
voltage proof
insulation resistance
contact resistance
center contact
outer contact

Environmental

operating temp.
RoHS compliant

Mechanische Eigenschaften

Steckgesicht nach Steckzyklen
Kupplungsdrehmoment

Bauteile

Innenkontakt
Außenkontakt
Isolierung

Elektrische Eigenschaften

Wellenwiderstand
Frequenz
Rückflussdämpfung

Betriebsspannung
Prüfspannung
Isolationswiderstand
Durchgangswiderstand
Innenkontakt
Außenkontakt

Umgebung

Betriebstemperatur
RoHS konform

IEC 61169-17 (TNC), IEC 60169-15 (SMA)
>500
TNC: 46-69 Ncm; SMA: 79-113 Ncm

Materials / Material

brass / messing
brass / Messing
PTFE

Finish / Oberfläche

gold plated / vergoldet
nickel plated / vernickelt

50 Ω
0-11 GHz
typ.: 1 GHz-32 dB; 2 GHz-26 dB;
3 GHz-22 dB; 5 GHz-15 dB

≤ 335 V_{eff} / 50 Hz
1 kV_{eff} / 50 Hz
≥ 5 MΩ

≤ 5 mΩ
≤ 2,5 mΩ

-40°C / +85°C
2011/65/EU

Änd./ rev. index	Änderungs-Nr. / revision code	Datum/ date	Name/ name	Datum/ date	Name/ name	Gewicht/ weight (g)		
			gez./ drawn	06.08.2014	MA	ca./approx.		
			gepr./ appr.	30.06.2015	KL			
			Maßstab/ scale	Benennung/ title				
			2:1	Adaptor TNC - SMA (m-m) Adapter TNC - SMA (m-m)				
			untol. Maße/ dim. without tolerances according to	Unterl./doc. type	Zeichnungsnr./ drawing no.			 Maße/ dimensions: mm
				K	J01019A0034			
			Ersatz für/ replaces				Original : DIN A4	
						Blatt/ sheet 1 von/ of 1		