

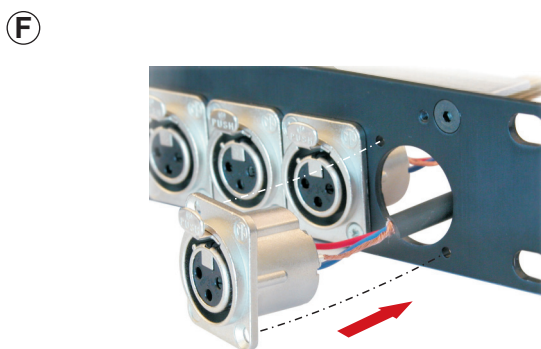
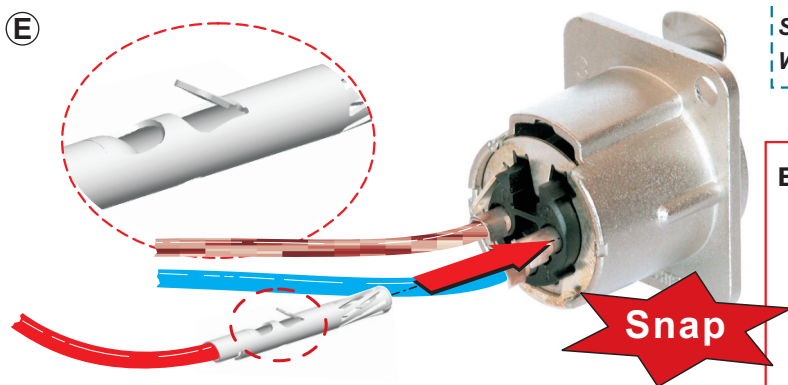



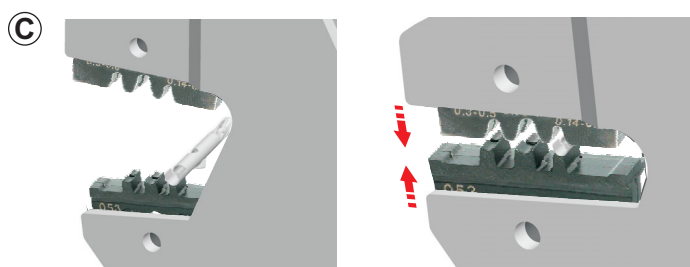

# ASSEMBLY INSTRUCTION

## NC3FD-LX-HA | DLX Serie - Crimp XLR Chassis Connector

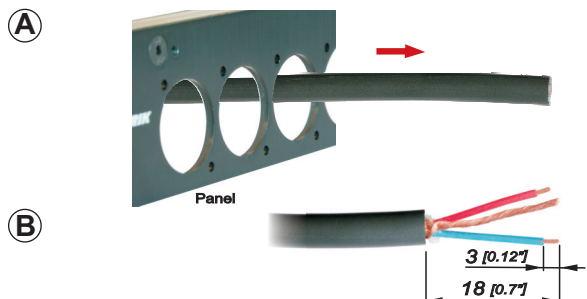

**(A) ATTENTION:**  
Cable length protruding the panel should give enough space for crimp operation.

**(B)** Prepare cable as shown (twist the screen).

**(C)** Position a contact in the die and hold the contact by pressing the tool slightly together - DO NOT CRIMP!

**(D)** Position the wire in the contact & crimp it.

Repeat steps C, D, E for the remaining two contacts.

**(E)** Push the crimped contacts into the insert until you notice a snap.


**Attention:**  
Align lug to the top!  
Pay attention to correct wiring!

PIN 1 ... Screen  
PIN 2 ... Hot, +  
PIN 3 ... Cold, -

**(F)** Position the connector in the panel and fasten it.

Standard crimp according IEC 60352-2 (B crimp).  
Wire size AWG 22 - 24, 0.22 - 0.34 mm<sup>2</sup>.

### EXTRACTION OF CONTACT





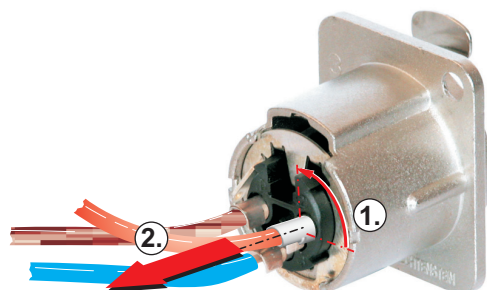


1. Turn the contact 90°
2. Pull the contact out of the insert
3. Insert new Contact



# ASSEMBLY INSTRUCTION

## NC3MD-LX-HA | DLX Serie - Crimp XLR Chassis Connector

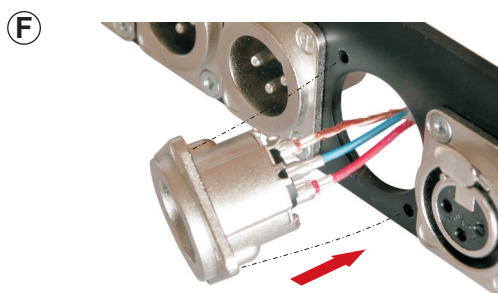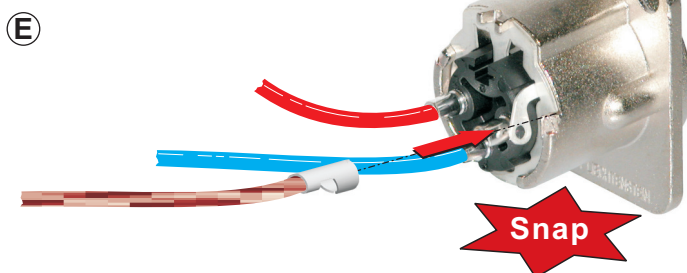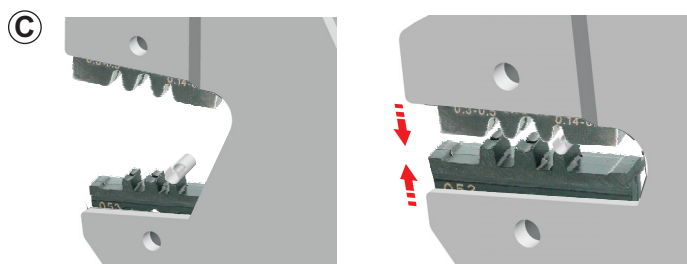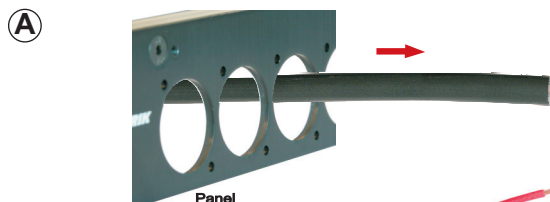

**A** **ATTENTION:**  
Cable length protruding the panel should give enough space for crimp operation.

**B** Prepare cable as shown (twist the screen).

**C** Position a contact in the die and hold the contact by pressing the tool slightly together - DO NOT CRIMP!

**D** Position the wire in the contact & crimp it.

Repeat steps C, D, E for the remaining two contacts.

**E** Push the crimped contacts into the insert until you notice a snap.

**Attention:**  
Align lug to the top!  
Pay attention to correct wiring!

PIN 1 ... Screen  
PIN 2 ... Hot, +  
PIN 3 ... Cold, -

**F** Position the connector in the panel and fasten it.

Standard crimp according IEC 60352-2 (B crimp).  
Wire size AWG 22 - 24, 0.22 - 0.34 mm<sup>2</sup>.

NEUTRIK AG  
NEUTRIK Zürich AG  
NEUTRIK USA Inc.  
NEUTRIK (UK) Ltd.

LI  
CH  
USA  
UK

T: +423 / 237 24 24  
T: +41 44 / 736 5010  
T: +1 732 / 901 9488  
T: +44 1983 / 811 441

F: +423 / 232 53 93  
F: +41 44 / 736 5011  
F: +1 732 / 901 9608  
F: +44 1983 / 811 439

NEUTRIK Vertriebs GmbH  
NEUTRIK France  
NEUTRIK Tokyo Ltd.  
NEUTRIK Hong Kong Ltd.

DE/NL/AT  
FR  
JP  
HK

T: +49 8131 / 280 890  
T: +33 1 / 4131 6750  
T: +81 3 / 3663 4733  
T: +852 / 2687 6055

F: +49 8131 / 280 830  
F: +33 1 / 4131 0511  
F: +81 3 / 3663 4796  
F: +852 / 2687 6052

Draft. Nr.: BDA 184-0 / 3102M1541 | Update: 30.06.2008 | Data subject to change without prior notice. ©2008 NEUTRIK®. ALL RIGHTS RESERVED.