



OPERATING INSTRUCTION

powerCON® TRUE1 TOP | Cable Connector

1. CONNECTING




Note:
When connecting, match the notch on the cable connector to the corresponding guide slot on the chassis.




SAFETY WARNING

incorrect insertion may cause electrical contact misalignment resulting in equipment malfunction and/or personal injury.

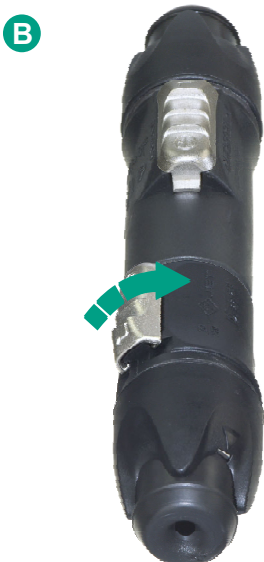

Note:
After inserting properly as in illustration **A**, twist the cable connector clockwise to lock.

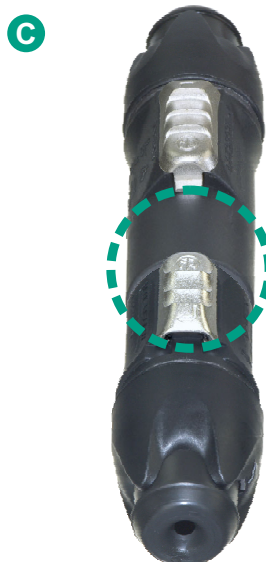

click



Note:
The proper twist-lock is achieved when the silver tab is in the position shown in **C** and an audibel «click» is heard.



2. UNLOCKING



Application:


The powerCON TRUE1 TOP system is certified as a connector with breaking capacity according to IEC 60320, VDE 0625. It is intended to use as an appliance coupler and interconnection coupler. It serves to supply power to an appliance and from an appliance to other equipment. To be installed by qualified personnel only.

CONNECTOR ASSIGNMENT:

APPLIANCE INLET

NAC3MPX-TOP
NAC3MPX-WOT-TOP

Power IN ▶




NAC3FX-W-TOP
(Connector)


APPLIANCE OUTLET

NAC3FPX-TOP
NAC3FPX-WOT-TOP
NAC3FPX-ST-TOP

Power OUT ◀



NAC3MX-W-TOP
(Plug connector)





NAC3FX-W-TOP
(Connector)

APPLIANCE INLET / OUTLET ▶ Combination

NAC3PX-TOP

Power IN ▶



NAC3MX-W-TOP
(Plug connector)

Power OUT ◀

powerCON TRUE1 TOP line is full backward compatible with the preceding powerCON TRUE1 products.

Approval based:	VDE EN 60320-1/EN60320-2-2	UL UL 498 / CSA C22.2 No. 182.3
Rating:	250 V ac / 16 A	250 V ac / 20 A
Cable Type:	H05VV-F3G 1.0 mm ² , Length max. 2 m H05VV-F3G 1.5 - 2.5 mm ² H07RN-F3G 1.5 mm ²	SJTOW, SJOOW 3 x 12 AWG
Strain Relief:	White chuck	White chuck
Cable O.D.:	6.0 - 12.0 mm	6.0 - 12.0 mm