



ASSEMBLY INSTRUCTION

NL4FX / NL4FRX





speakON® SPX Series | Lockable Loudspeaker Connector

IMPORTANT SAFETY INSTRUCTION

Electrical Rating acc. UL & CSA:
USR: 40A/250V, CNR: 25A/250V

“CAUTION: NOT FOR INTERRUPTING CURRENT”

“ATTENTION: NE PAS UTILISER POUR COUPER LE COURANT”

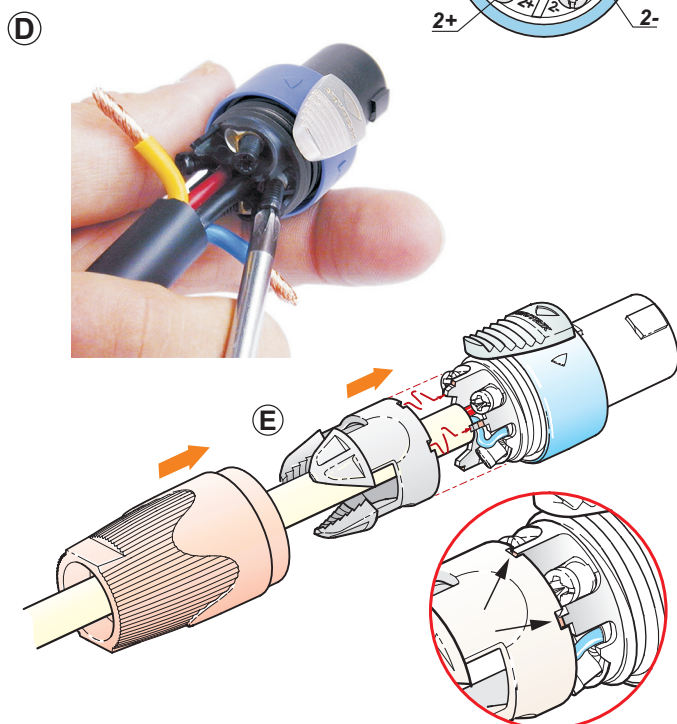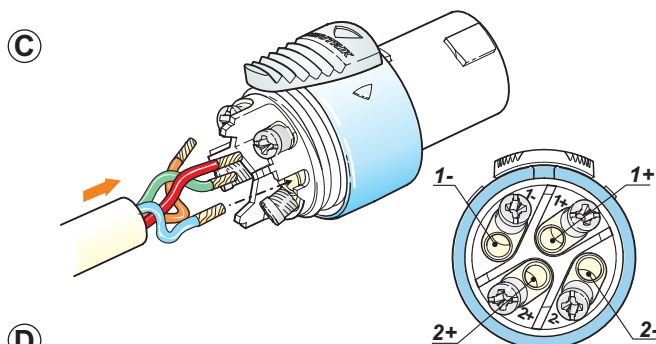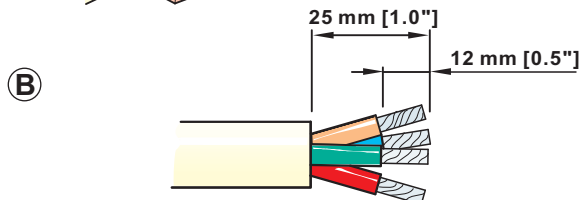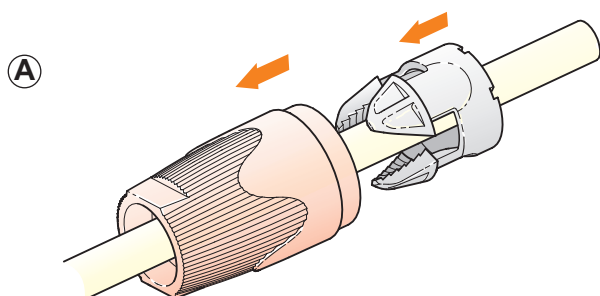

Assembly of the Connector:

Ⓐ Place bushing and chuck over cable.

Ⓑ Prepare cable as shown.

Important is the stripping length of 25 mm and 12 mm.

Ⓒ Insert wires into terminals and secure clamp terminals with screw driver (Pozidrive®).

Ⓓ For easy wiring especially on big cables, first screw on the inner contacts 1+ and 2+ and afterwards the outer contacts 1- and 2- !

Ⓔ Push chuck up to housing .

Important: Align the chuck by positioning the nose into the recess.

Ⓕ Tighten the bushing


INFO to the screw driver:



DO NOT USE!


Pozidrive #1

Philips

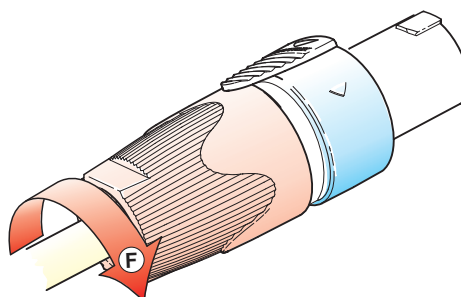




Assembly of the Conversion Kit:

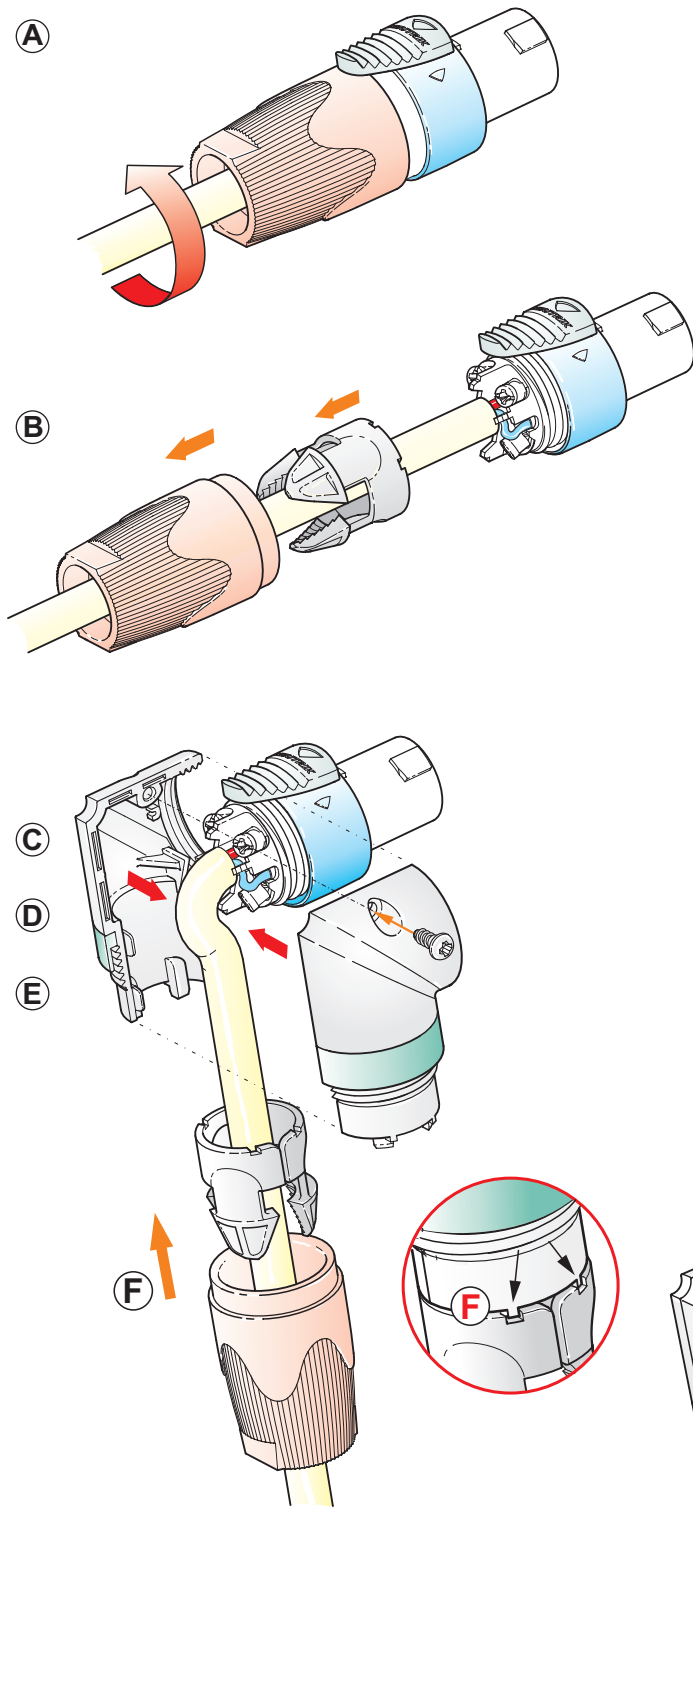


- A** Open the bushing.
- B** Slide the bushing and the chuck back.
- C** Bend the cable as shown.
- D** Position the two conversion shells to fit on the connector thread.
- E** Press together and fix by screw.
- F** Slide the chuck onto the housing and fasten the bushing.
Important: Align the chuck by positioning the nose into the recess.

Handling:

Engagement:

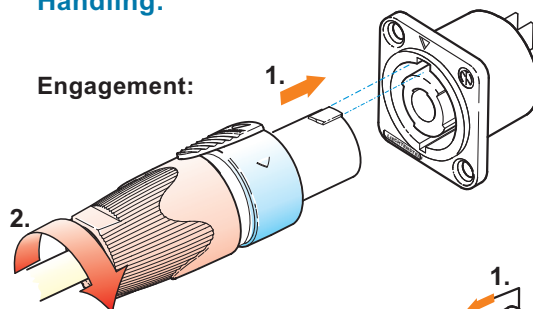

Separation:

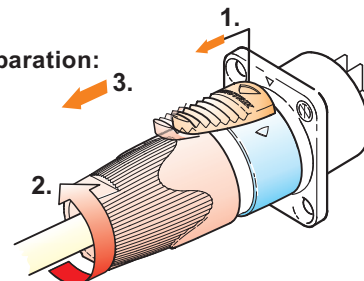

NEUTRIK AG
NEUTRIK USA Inc.
NEUTRIK (UK) Ltd.
NEUTRIK Vertriebs GmbH

LI
USA
UK
DE/NL/AT/DK

T: +423 / 237 24 24
T: +1 732 / 901 9488
T: +44 1983 / 811 441
T: +49 8131 / 280 890

F: +423 / 232 53 93
F: +1 732 / 901 9608
F: +44 1983 / 811 439
F: +49 8131 / 280 830

NEUTRIK France
NEUTRIK Tokyo Ltd.
NEUTRIK Hong Kong Ltd.

FR
JP
HK

T: +33 1 / 4131 6750
T: +81 3 / 3663 4733
T: +852 / 2687 6055

F: +33 1 / 4131 0511
F: +81 3 / 3663 4796
F: +852 / 2687 6052