


MGJS (JDD TECH) SILICONE HEAT SHRINK TUBE



This tubing is designed to provide reliable protection and sealing in applications exposed to temperature extremes. The flexible silicone material retains its elasticity and protective properties over time, even under thermal stress. It is suitable for use in electronics, automotive systems, industrial assemblies, and general-purpose applications where durability and stability are required. Compliance with industry standards ensures safe and dependable performance in professional environments.

TECHNICAL DATA:

- ✓ **Working temperature:** -60°C~+200°C
- ✓ **Breakdown voltage:** 4kv or 7kv
- ✓ **Flammability:** VW-1
- ✓ **Color:** Black
- ✓ **Approval:** RoHS, UL

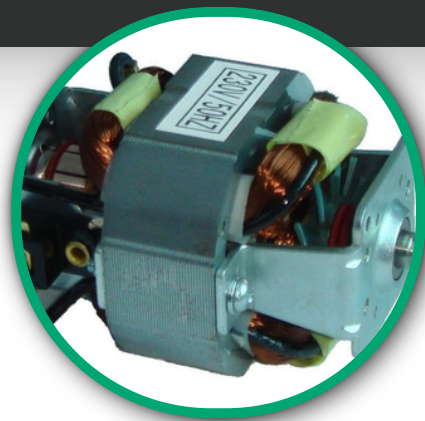

Diameter	Article	Tolerance, mm	Thickness wall 4kv, mm	Thickness wall 7kv, mm	Packing quantity
1.0 mm	MGJS-1.0	+0.3 / -0.1	0.35 ±0.05	0.5 ±0.1	100 m
1.5 mm	MGJS-1.5	+0.3 / -0.1	0.35 ±0.05	0.5 ±0.1	100 m
2.0 mm	MGJS-2.0	+0.3 / -0.1	0.45 ±0.05	0.5 ±0.1	100 m
2.5 mm	MGJS-2.5	+0.3 / -0.1	0.45 ±0.05	0.5 ±0.1	100 m
3.0 mm	MGJS-3.0	+0.3 / -0.1	0.45 ±0.05	0.5 ±0.1	100 m
3.5 mm	MGJS-3.5	+0.3 / -0.1	0.5 ±0.05	0.5 ±0.1	100 m
4.0 mm	MGJS-4.0	+0.3 / -0.1	0.5 ±0.05	0.6 ±0.1	100 m
4.5 mm	MGJS-4.5	+0.3 / -0.1	0.5 ±0.05	0.6 ±0.1	100 m
5.0 mm	MGJS-5.0	+0.4 / -0.1	0.5 ±0.05	0.6 ±0.1	100 m
5.5 mm	MGJS-5.5	+0.4 / -0.1	0.5 ±0.05	0.6 ±0.1	100 m
6.0 mm	MGJS-6.0	+0.4 / -0.1	0.55 ±0.05	0.6 ±0.1	100 m
7.0 mm	MGJS-7.0	+0.4 / -0.1	0.55 ±0.05	0.6 ±0.1	100 m
8.0 mm	MGJS-8.0	+0.4 / -0.1	0.6 ±0.05	0.7 ±0.1	50 m
9.0 mm	MGJS-9.0	+0.5 / -0.1	0.7 ±0.05	0.8 ±0.1	50 m

Diameter	Article	Tolerance, mm	Thickness wall 4kv, mm	Thickness wall 7kv, mm	Packing quantity
10 mm	MGJS-10	+0.5 / -0.1	0.7 ±0.05	0.8 ±0.1	50 m
11 mm	MGJS-11	+0.5 / -0.1	0.7 ±0.05	0.8 ±0.1	50 m
12 mm	MGJS-12	+0.5 / -0.1	0.7 ±0.05	0.8 ±0.1	50 m
13 mm	MGJS-13	+0.5 / -0.1	0.7 ±0.05	0.8 ±0.1	50 m
14 mm	MGJS-14	+0.5 / -0.1	0.7 ±0.05	0.8 ±0.1	50 m
15 mm	MGJS-15	+0.5 / -0.1	0.7 ±0.05	0.8 ±0.1	50 m
16 mm	MGJS-16	+0.5 / -0.1	0.7 ±0.05	0.8 ±0.1	50 m

