

# DUAL WALL HEAT SHRINKABLE TUBE


This series is designed to provide enhanced insulation and reliable environmental sealing for electrical connections. The outer protective layer ensures mechanical strength, while the inner adhesive layer melts during heating to create a strong bond with cables and components. After cooling, the tubing forms a secure moisture-resistant seal that improves long-term protection and durability.

This product line is widely used for protecting connectors, wire joints, and cable assemblies in demanding operating conditions.



## TECHNICAL DATA:

- ✓ **Polyethylene & hot melting adhesive**
- ✓ **Operating range:** -45 °C ~+125 °C
- ✓ **Shrinking ratio:** 3:1
- ✓ **Longitudinal shrinkage:** ≤8%
- ✓ **Certificate:** UL,CSA,RoHS,Halogen Free
- ✓ **Cutting tool:** Heat gun,Oven

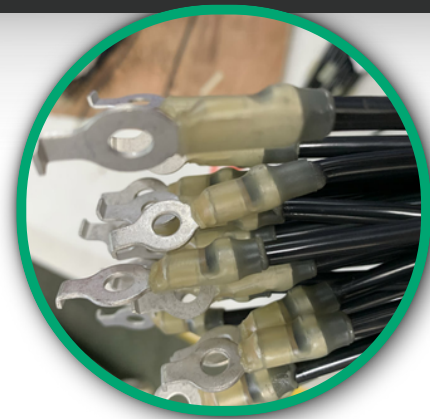

Article	Unshrunk		Shrunk		Packing
	diameter	wall thickness	diameter	wall thickness	
MSBG3-3.2	3.2 mm	1 mm	1 mm	0.4 mm	200 m
MSBG3-4.8	4.8 mm	1.6 mm	1.1 mm	0.4 mm	100 m
MSBG3-6.4	6.4 mm	2 mm	1.2 mm	0.5 mm	100 m
MSBG3-7.9	7.9 mm	2.7 mm	1.4 mm	0.5 mm	100 m
MSBG3-9.5	9.5 mm	3.2 mm	1.4 mm	0.5 mm	50 m
MSBG3-12.7	12.7 mm	4.2 mm	1.7 mm	0.5 mm	1.22 m
MSBG3-15	15 mm	5 mm	1.8 mm	0.6 mm	1.22 m
MSBG3-19.1	19.1 mm	6.3 mm	2 mm	0.6 mm	1.22 m
MSBG3-25.4	25.4 mm	8.5 mm	2.1 mm	0.6 mm	1.22 m
MSBG3-30	30 mm	10.2 mm	2.2 mm	0.6 mm	1.22 m
MSBG3-39	39 mm	13.5 mm	2.4 mm	0.6 mm	1.22 m
MSBG3-50	50 mm	17 mm	2.7 mm	0.7 mm	1.22 m
MSBG3-64	64 mm	21 mm	3 mm	0.7 mm	1.22 m
MSBG3-75	75 mm	25 mm	3.2 mm	1 mm	1.22 m

Article	Unshrunk		Shrunk		Packing
	diameter	wall thickness	diameter	wall thickness	
MSBG3-90.0	90 mm	30 mm	3.3 mm	1 mm	1.22 m
MSBG3-100.0	100 mm	34 mm	3.5 mm	1.2 mm	1.22 m
MSBG3-125.0	125 mm	42 mm	3.5 mm	1.2 mm	1.22 m

