


2:1 PTFE Heatshrink Tubing

2:1 Polytetrafluoroethylene heatshrink tubing has the lowest coefficient of friction of any polymer and possesses a broad temperature range, allowing it to excel equally in extreme cold and hot environments.



- **Shrink Temperature 650°F (343°C)**
- **Mil-I-DTL-23053/12**
- **Excellent Dielectric Strength**
- **Resistant to All Common Solvents, Acids, and Bases**
- **High Operating Temp. up to 500°F (260°C)**

Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Wall Thickness	Put Up/4'Pcs.	Available Colors
24 AWG	M23053-12-201-C	1.27mm	0.69mm	0.30mm	1	Clear (CL)
22 AWG	M23053-12-202-C	1.40mm	0.81mm	0.30mm	1	Clear (CL)
20 AWG	M23053-12-203-C	1.52mm	0.99mm	0.41mm	1	Clear (CL)
19 AWG	M23053-12-204-C	1.65mm	1.09mm	0.41mm	1	Clear (CL)
18 AWG	M23053-12-205-C	1.93mm	1.24mm	0.41mm	1	Clear (CL)
17 AWG	M23053-12-206-C	2.16mm	1.37mm	0.41mm	1	Clear (CL)
15 AWG	M23053-12-207-C	2.79mm	1.70mm	0.41mm	1	Clear (CL)
14 AWG	M23053-12-208-C	3.05mm	1.83mm	0.41mm	1	Clear (CL)
13 AWG	M23053-12-210-C	3.56mm	2.03mm	0.41mm	1	Clear (CL)
12 AWG	M23053-12-211-C	3.81mm	2.26mm	0.41mm	1	Clear (CL)
11 AWG	M23053-12-212-C	4.32mm	2.57mm	0.41mm	1	Clear (CL)
10 AWG	M23053-12-213-C	4.85mm	2.84mm	0.41mm	1	Clear (CL)
9 AWG	M23053-12-214-C	5.21mm	3.15mm	0.51mm	1	Clear (CL)
1/8"	M23053-12-215-C	5.46mm	3.30mm	0.51mm	1	Clear (CL)
8 AWG	M23053-12-216-C	6.10mm	3.58mm	0.51mm	1	Clear (CL)
7 AWG	M23053-12-217-C	6.86mm	4.01mm	0.51mm	1	Clear (CL)
6 AWG	M23053-12-218-C	7.67mm	4.52mm	0.51mm	1	Clear (CL)
5 AWG	M23053-12-219-C	8.13mm	5.03mm	0.51mm	1	Clear (CL)
4 AWG	M23053-12-220-C	9.40mm	5.69mm	0.51mm	1	Clear (CL)
3 AWG	M23053-12-221-C	9.91mm	6.32mm	0.51mm	1	Clear (CL)
1/4"	M23053-12-222-C	10.41mm	6.60mm	0.51mm	1	Clear (CL)
2 AWG	M23053-12-223-C	10.92mm	7.06mm	0.51mm	1	Clear (CL)
1 AWG	M23053-12-224-C	11.43mm	7.90mm	0.51mm	1	Clear (CL)
5/16"	M23053-12-225-C	11.94mm	8.36mm	0.51mm	1	Clear (CL)
0 AWG	M23053-12-226-C	11.94mm	8.81mm	0.51mm	1	Clear (CL)
3/8"	M23053-12-228-C	14.22mm	10.13mm	0.64mm	1	Clear (CL)
7/16"	M23053-12-229-C	16.64mm	11.73mm	0.64mm	1	Clear (CL)
1/2"	M23053-12-230-C	19.05mm	13.31mm	0.64mm	1	Clear (CL)
5/8"	M23053-12-231-C	23.62mm	16.64mm	0.76mm	1	Clear (CL)
3/4"	M23053-12-232-C	28.58mm	19.96mm	0.89mm	1	Clear (CL)
7/8"	M23053-12-233-C	33.27mm	23.14mm	0.89mm	1	Clear (CL)
1"	M23053-12-234-C	38.10mm	26.31mm	0.89mm	1	Clear (CL)

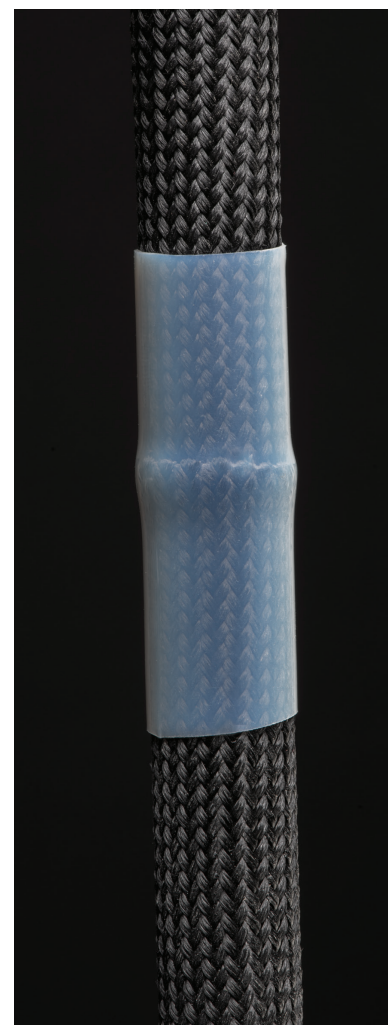

When ordering our 2:1 PTFE heatshrink, order as size after shrinking.