



HEAVY  
DUTY

# Gator Wrap

## Extreme Heavy Duty Abrasion Sleeve with Easy On, Easy Off Hook & Loop Closure

GATOR WRAP is made of proprietary extreme abrasion fabric. This protection sleeve is used for bundling and wrapping hoses and cables. The reusable sleeve feature Mil-Spec extreme Hook & Loop closure which allows installation without disconnecting hoses and can reduce labor time by 70%.

Gator Wrap is an excellent choice for applications requiring protection from the toughest abrasion. This heavy duty abrasion sleeve is being used in the oil field industry on frac hoses and on drill rigs, and in the timber industry to replace spiral wrap.

- **50,000+ Cycles\***
- **50 Mil Wall Thickness**
- **Proprietary Abrasion Fabric**
- **Extreme, Oversized Hook & Loop Closure**
- **Very Puncture & Tear Resistant**
- **Sheds Surface Moisture**
- **Resistant to Water and Petroleum**
- **Excellent Welding Sparks and Spall Resistance**



Nominal Size	Part #	Wall Thickness	Hook & Loop Width	Standard Spool Put-Ups		Available Colors	Lbs/100'
				Bulk Spool	Shop Spool		
1 3/8"	DWG1.38BK	.05"	1 1/4"	75'	25'	Black (BK)	19.60
1 3/4"	DWG1.75BK	.05"	1 1/4"	75'	25'	Black (BK)	
2"	DWG2.00BK	.05"	1 1/4"	75'	25'	Black (BK)	
2 1/2"	DWG2.50BK	.05"	1 1/4"	75'	25'	Black (BK)	21.60
3"	DWG3.00BK	.05"	1 1/4"	75'	25'	Black (BK)	
3 1/2"	DWG3.50BK	.05"	1 1/4"	75'	25'	Black (BK)	
4"	DWG4.00BK	.05"	1 1/4"	75'	25'	Black (BK)	40.40
4 1/2"	DWG4.50BK	.05"	1 1/4"	75'	25'	Black (BK)	
5"	DWG5.00BK	.05"	1 1/4"	75'	25'	Black (BK)	
6"	DWG6.00BK	.05"	1 1/4"	75'	25'	Black (BK)	



\*Abrasion Resistance

950	2,500	3,500	4,400	8,500	13,000	50,000+
-----	-------	-------	-------	-------	--------	---------

HIGH

EXTREMELY HIGH!!!

800 323-5140  
www.techflex.com



**GATOR WRAP**

- Proprietary Abrasion Fabric
- Extreme, Oversized Hook And Loop Closure
- Very Puncture and Tear Resistant
- Resistant to Water and Petroleum
- Sheds Surface Moisture

**Put-Ups**

Nominal Size	Part #	Wall Thickness	Hook & Loop Width	Bulk Spool	Shop Spool	Available Colors	Lbs/100'
1 3/8"	DWG1.38BK	0.05"	1 1/4"	75'	25'	Black	
1 3/4"	DWG1.75BK	0.05"	1 1/4"	75'	25'	Black	19.6
2"	DWG2.00BK	0.05"	1 1/4"	75'	25'	Black	
2 1/2"	DWG2.50BK	0.05"	1 1/4"	75'	25'	Black	21.6
3"	DWG3.00BK	0.05"	1 1/4"	75'	25'	Black	
3 1/2"	DWG3.50BK	0.05"	1 1/4"	75'	25'	Black	
4"	DWG4.00BK	0.05"	1 1/4"	75'	25'	Black	
4 1/2"	DWG4.50BK	0.05"	1 1/4"	75'	25'	Black	
5"	DWG5.00BK	0.05"	1 1/4"	75'	25'	Black	40.4
6"	DWG6.00BK	0.05"	1 1/4"	75'	25'	Black	




**Cut Cleanly**  
Scissor

**Heavy Duty Abrasion Sleeve With Easy On, Easy Off Hook & Loop Closure**

GATOR WRAP is made of proprietary extreme abrasion fabric. This protection sleeve is used for bundling and wrapping hoses and cables. The reusable sleeve features Mil-Spec extreme Hook & Loop closure which allows installation without disconnecting hoses and can reduce labor time by 70%.

Gator Wrap (GW) is an excellent choice for applications requiring protection from the toughest abrasion. This heavy duty abrasion sleeve is being used in the oil field industry on frac hoses and on drill rigs, and in the timber industry to replace spiral wrap.

- Colors Available:  
Black (BK)

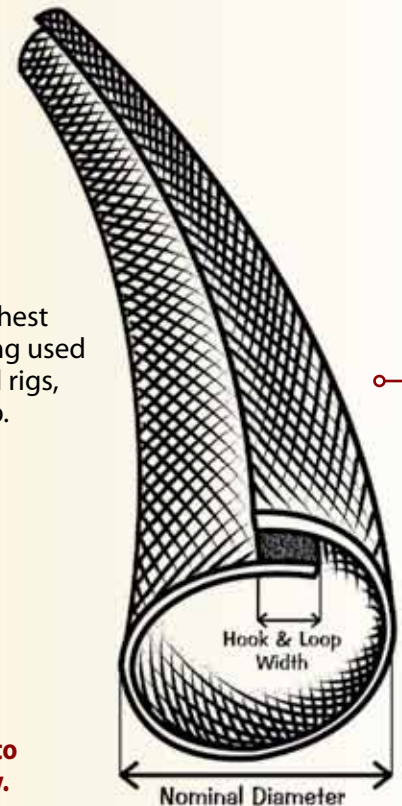

■ This is a non-expandable product. Be sure to match your application diameter accurately.

**Material**  
Proprietary Abrasion Fabric

**Grade**  
DWG

**Wall Thickness**  
.05"

**Drawing Number**  
TF001TW-TW







**GATOR WRAP**



**Abrasion Resistance**  
**Extremely High!!!**

**Abrasion Test Machine**  
**Taber 5150**

**Abrasion Test Wheel**  
**Calibrase H-18**

**Abrasion Test Load**  
**500g**

**Room Temperature**  
**69°F**

**Humidity**  
**50%**

**No Major Wear**  
**10,000 Test Cycles**

**Slight Change. Coating**  
**Worn But Still Intact.**  
**50,000 Test Cycles**

**Pattern Continues. No**  
**Significant Change.**  
**100,000 Test Cycles**

**Pre-Test Weight**  
**11,673.3 mg**

**Post-Test Weight**  
**0 mg**

**Test End Loss Of Mass**  
**Point Of Destruction**  
**11,673.3 mg**




**Chemical Resistance**

1=No Effect    4=More Affected  
 2=Little Effect    5=Severely Affected  
 3=Affected

Aromatic Solvents	_____	1
Aliphatic Solvents	_____	1
Chlorinated Solvents	_____	1
Weak Bases	_____	1
Salts	_____	1
Strong Bases	_____	1
Salt Water 0-S-1926	_____	1
Hydraulic Fluid MIL-H-5606	_____	1
Lube Oil MIL-L-7808	_____	1
De-Icing Fluid MIL-A-8243	_____	1
Strong Acids	_____	1
Strong Oxidants	_____	1
Esters/Keytones	_____	1
UV Light	_____	1
Petroleum	_____	1
Fungus ASTM G-21	_____	1
RoHS	_____	Yes

**Maximum Continuous**  
*Mil-I-23053*  
**250°F (121°C)**

**Minimum Continuous**  
**-60°F (-51°C)**

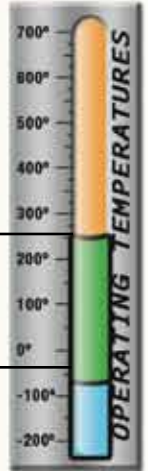

**PHYSICAL PROPERTIES**

Monofilament Diameter	_____	NA
Recommended Cutting	_____	Scissor
Colors	_____	1
Wall Thickness	_____	.05

www.techflex.com