


- **Mil-I-DTL-23053/5**
- **Flame Retardant**
- **Excellent High Frequency EMI Shielding**
- **RoHS**
- **Easily Installs Over Connectors & Splices**

2:1, 3:1, And 4:1 Shield Heatshrink Tubing

Shielding heatshrink tubing is a unique combination of polyolefin and conductive cloth, with high frequency EMI shielding properties. This product, a flame retardant and fluid resistant tubing, is a perfect solution for protecting your wire & cable bundles. Shield Heatshrink comes in 2:1, 3:1, and 4:1 shrink ratio, and it is available in 4' sticks.

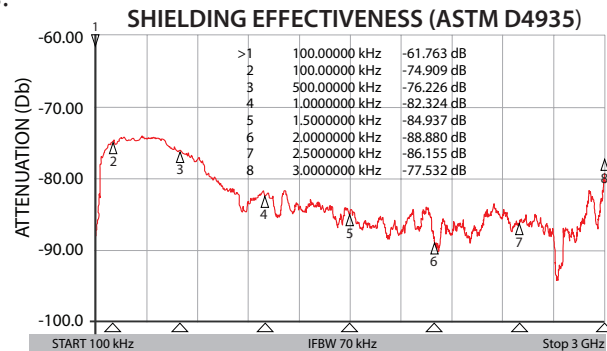

Shrinks to 1/2 its original diameter

Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Bulk Box Put Up/4' Pcs.	Shop Box Put Up/4' Pcs.	Available Colors	Lbs/10Pcs.
3/16"	H2C0.19BK	4.8mm	2.4mm	12	2	Black (BK)	0.28
1/4"	H2C0.25BK	6.4mm	3.2mm	12	2	Black (BK)	0.47
3/8"	H2C0.38BK	9.5mm	4.8mm	12	2	Black (BK)	0.61
1/2"	H2C0.50BK	12.7mm	6.4mm	12	2	Black (BK)	0.72
3/4"	H2C0.75BK	19.1mm	9.5mm	12	2	Black (BK)	1.18
1"	H2C1.00BK	25.4mm	12.7mm	12	2	Black (BK)	1.70
1 1/2"	H2C1.50BK	38.1mm	19.1mm	12	2	Black (BK)	2.55

Shrinks to 1/3 its original diameter

Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Bulk Box Put Up/4' Pcs.	Shop Box Put Up/4' Pcs.	Available Colors	Lbs/10Pcs.
3/8"	H3C0.38BK	8.0mm	3.0mm	12	2	Black (BK)	0.49
1/2"	H3C0.50BK	12.0mm	4.0mm	12	2	Black (BK)	0.62
3/4"	H3C0.75BK	18.0mm	6.0mm	12	2	Black (BK)	0.90
1"	H3C1.00BK	24.0mm	8.0mm	12	2	Black (BK)	1.35
1 1/2"	H3C1.50BK	40.0mm	13.0mm	12	2	Black (BK)	2.12
2"	H3C2.00BK	50.0mm	17.0mm	12	2	Black (BK)	2.94

Shrinks to 1/4 its original diameter

Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Bulk Box Put Up/4' Pcs.	Shop Box Put Up/4' Pcs.	Available Colors	Lbs/10Pcs.
3/4"	H4C0.75BK	19.1mm	4.6mm	12	2	Black (BK)	1.25
1"	H4C1.00BK	25.4mm	6.6mm	12	2	Black (BK)	1.51
1 1/2"	H4C1.50BK	38.1mm	9.5mm	12	2	Black (BK)	2.02
2"	H4C2.00BK	50.8mm	12.7mm	12	2	Black (BK)	3.71