

Data sheet


OpDAT REGpro front cover 3RU, 7HP
6xLC-D UPC OS2 (ceramic, blue)

Page 1/4


P/N
15024A7406-E
 EAN 4251122197550

2018-18-01

Illustrations

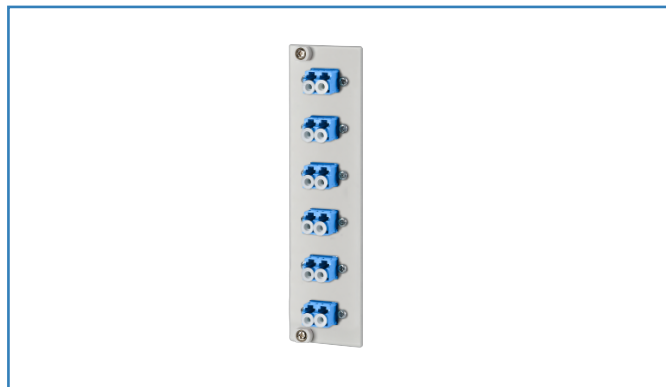

Dimensional drawing

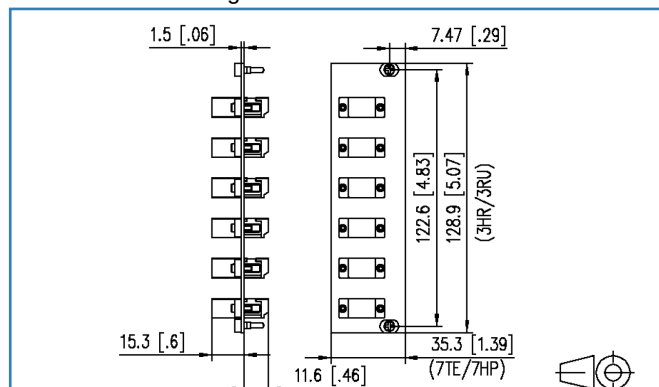

See enlarged drawings at the end of document

Product specification

- front plate 3RU/7HP LC-D adapters
- slotted ceramics sleeve for single mode applications
- slotted metal sleeve (Ph-Br) for multi mode applications
- suitable for mounting in OpDAT REGpro
- gray, powder-coated steel sheet
- variants: 6xLC-D (blue), 3xLC-D (blue), 6xLC-D (heather violet), 3xLC-D (heather violet), 6xLC-D (aqua), 3xLC-D (aqua), 6xLC-D (beige), 3xLC-D (beige)

Data sheet

Page 2/4

OpDAT REGpro front cover 3RU, 7HP 6xLC-D UPC OS2 (ceramic, blue)

P/N

15024A7406-E

EAN 4251122197550

2018-18-01

Technical Data

General Data

Fields of application	Structured building cabling
Design	Front cover
Mounting style	3RU/7HP
Transmission technology	Fiber optic
Color	blue
Dimensions	
Dimension (L x W x H)	30.70 x 128.90 x 35.30 mm
Dimension (L x W x H)	1.209 x 5.075 x 1.39 in.
Height unit	3RU
Horizontal pitch	7Units
Mode type of the fiber	Single mode

Connections/interfaces

Connector technology interface 1	LC-D Couplers
Connector technology interface 2	LC-D Couplers
Number of ports interface 1	6
Number of ports interface 2	6
Number of equipped ports interface 1	6
Number of ports interface 2 equipped	6
Number of ports with dust protection interface 1	6
Number of ports with dust protection interface 2	6

Mechanical characteristics

Cut-out	SC, LC-D, E2000
Life - Number of mating cycles	min. 1000

Materials and material properties

Material - Mounting plate	steel
Material - Mounting plate finish	powder-coated
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics

Data sheet

Page 3/4

OpDAT REGpro front cover 3RU, 7HP 6xLC-D UPC OS2 (ceramic, blue)

P/N

15024A7406-E

EAN 4251122197550

2018-18-01

Technical Data

Approvals

RoHS	compliant
------	-----------

The product meets the following standards

Fibre optic connector interfaces	DIN EN 61754-20
----------------------------------	-----------------

Classifications

ETIM 5.0	EC001130
----------	----------

ETIM 6.0	EC001130
----------	----------

Packing details

Type of packaging	1 pc(s) / plastic bag
Packaging unit - Weight (gram)	280.00 g
Packaging unit - Weight (pound)	0.62 lb
Packaging dimension (W x H x D)	160.00 x 100.00 x 380.00 mm
Packaging dimension (W x H x D)	6.299 x 3.937 x 14.961 in.

P | Cabling

Data sheet

OpDAT REGpro front cover 3RU, 7HP
6xLC-D UPC OS2 (ceramic, blue)

Page 4/4

P/N

15024A7406-E

EAN 4251122197550

2018-18-01

Illustrations

Dimensional drawing

