


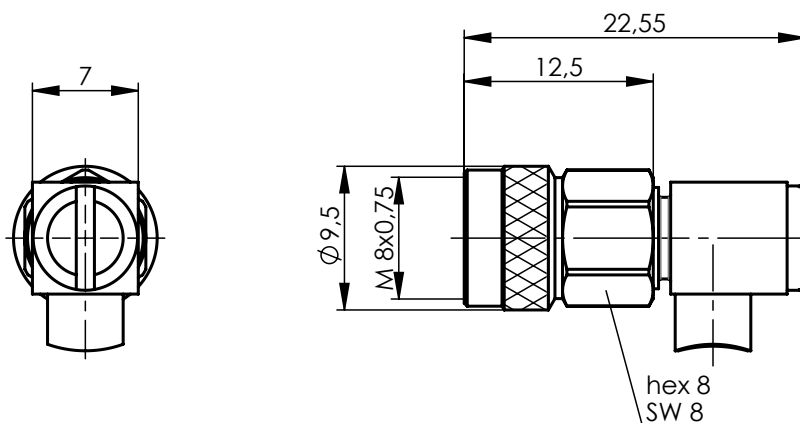

Mechanical characteristics

cables

interface dimensions acc. to assembly instruction

centre conductor

outer conductor

mating life

Components

centre contact

outer contact

other metal parts

insulator

o-ring

Electrical characteristics

impedance

frequency

return loss

intermodulation

voltage proof

power rating

Environmental

operating temp.

mating face sealing (plugged)

RoHS compliant

Mechanische Eigenschaften

Kabel

Steckgesicht nach Montageanleitung

Innenleiter

Außenleiter

Steckzyklen

Bauteile

Innenkontakt

Außenkontakt

sonstige Metallteile

Isolierung

O-Ring

Elektrische Eigenschaften

Wellenwiderstand

Frequenz

Rückflussdämpfung

Intermodulation

Prüfspannung

Leistungsübertragung

Umgebung

Betriebstemperatur

Querdichtigkeit

RoHS konform

G10 (UT-141): 1673A Belden; EZ 141 Suhner; Flexiform 402 NM Habia Cable; RG-402/U; Sucoform 141 Suhner; UT-141 Micro-Coax

1.5-3.5

C43

solder / löt

solder / löt

>100

Material / Material

brass/ Messing

brass/ Messing

brass / Messing

PTFE

silicone

Finish / Oberfläche

Cu2Ag5

CuSnZn3


CuSnZn3

Ⓐ

M 1:1



Änd./ rev. index	Änderungs-Nr. / revision code	Datum/ date	Name/ name	Datum/ date	Name/ name	Gewicht/ weight [g]	
			gez./ drawn	16.10.2019	HB		
			gepr./ appr.	18.10.2019	BJ	ca./approx. 7	
a	31472	28.07.2020	KL	Maßstab/ scale 2:1 (1:1)		Benennung/ title 1.5-3.5 Angle Plug, Screw 1.5-3.5 Kabelwinkelstecker, Screw	
				untol. Maße/ dim. without tolerances according to		Untert./ doc. type K	Zeichnungsnr./ drawing no. J01480A0005
				Ersatz für/ replaces			
					 Telegärtner		
					 Maße/ dimensions: mm		
					Original : DIN A4		
					Blatt/ sheet 1 von/ of 1		

 **Telegärtner**