
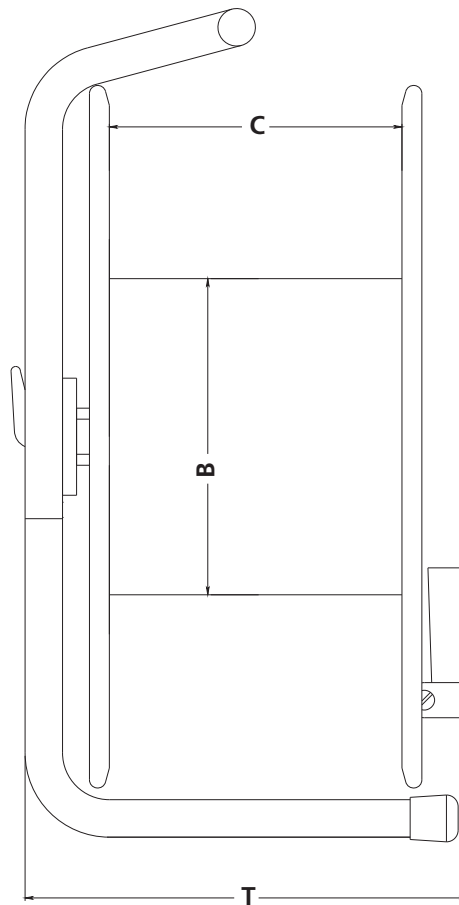


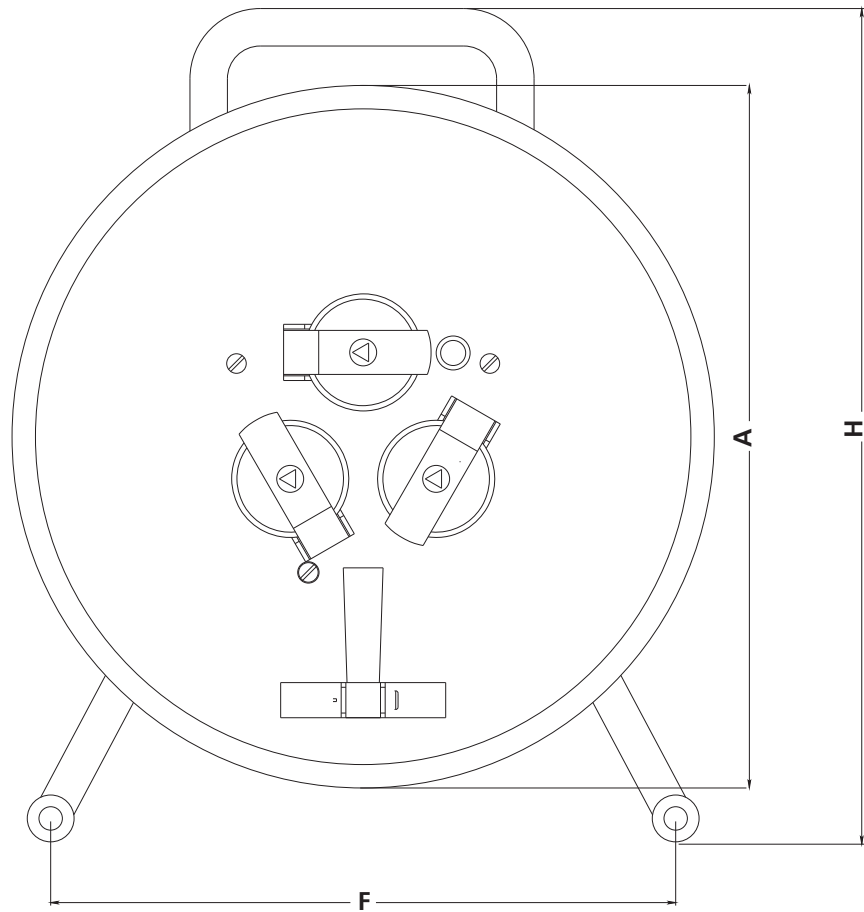

GT 380.C532C516MD2.33KS540

Special rubber cable drum with 1 CEE outlet 4-pin + E, 32A, 400V, 1 CEE outlet 4-pin + E, 16A, 400V, 2 safety contact machine outlets 2-pin + E, 16A, 250V, 1 4-pin contactor 40A, 400V, 1 cutout 3-pin, 16A, 1 cutout 1-pin, 16A, cable H07RN-F 5x4,0

Measures in mm/inch

A: 380 / 14,96

B: 236 / 9,29

C: 166 / 6,54

F: 310 / 12,2

H: 485 / 19,09

T: 285 / 11,22



Schill GmbH & Co. KG