

- **Rated to 464°F**
- **For High Temp - Low Voltage Applications**
- **Cut and Abrasion Resistant**
- **UL Recognized: VW-1**
- **Easy to Install - Cuts with Scissors**
- **Excellent Low Temp Flexibility**
- **Resists Most Organic Solvents**

## Heat Treated, Fray-Resistant Fiberglass Sleeving

Techflex INSULTHERM TRU-FIT (FGL) is a braided fiberglass sleeving which has been heat treated and impregnated with an acrylic binder to reduce fraying and dusting, and improve usability and performance. FGL is engineered for applications where temperatures as high as 1,200°F may occur.

FGL is used as primary insulation on low voltage applications such as leads in toasters, coffee makers, ranges, and other small appliances. FGL may also be used as insulation and protection for small heaters and resistors that operate at high temperatures, as well as to insulate over soldered connections when exposure to solder melt temperatures is possible.

Insultherm Tru-Fit provides a sturdy, long lasting, and inexpensive insulation solution. It is flexible and expandable, and can easily be installed over applications with irregular shapes and tight turns. Standard colors are Black and Natural, but other colors are available by special order. Contact your account representative for details.




Protect component wiring leads from heat and abrasion with Insultherm Tru-Fit for an attractive and permanent finish.



Nominal Size	Diameter	Part #	Wall Thickness	Expansion Range		Standard Spool Put-Ups		Available Colors
				Min.	Max.	Bulk Spool	Shop Spool	
24	0.022"	FGLG.24	.006"	0.020"	0.027"	500'	250'	WH,NT,YL,RD,BL,BK
22	0.027"	FGLG.22	.006"	0.025"	0.032"	500'	250'	WH,NT,YL,RD,BL,BK
20	0.034"	FGLG.20	.006"	0.032"	0.039"	500'	250'	WH,NT,YL,RD,BL,BK
18	0.042"	FGLG.18	.006"	0.040"	0.049"	500'	250'	WH,NT,YL,RD,BL,BK
16	0.053"	FGLG.16	.006"	0.051"	0.061"	500'	250'	WH,NT,YL,RD,BL,BK
14	0.066"	FGLG.14	.006"	0.064"	0.072"	500'	250'	WH,NT,YL,RD,BL,BK
12	0.085"	FGLG.12	.006"	0.081"	0.089"	250'	100'	WH,NT,YL,RD,BL,BK
11	0.095"	FGLG.11	.008"	0.091"	0.101"	250'	100'	WH,NT,YL,RD,BL,BK
10	0.106"	FGLG.10	.008"	0.102"	0.112"	250'	100'	WH,NT,YL,RD,BL,BK
9	0.118"	FGLG.09	.008"	0.114"	0.124"	250'	100'	WH,NT,YL,RD,BL,BK
8	0.133"	FGLG.08	.008"	0.129"	0.141"	250'	100'	WH,NT,YL,RD,BL,BK
7	0.148"	FGLG.07	.008"	0.144"	0.158"	250'	100'	WH,NT,YL,RD,BL,BK
6	0.166"	FGLG.06	.010"	0.162"	0.178"	250'	100'	WH,NT,YL,RD,BL,BK
5	0.186"	FGLG.05	.010"	0.182"	0.198"	250'	100'	WH,NT,YL,RD,BL,BK
4	0.208"	FGLG.04	.010"	0.204"	0.224"	250'	100'	WH,NT,YL,RD,BL,BK
3	0.234"	FGLG.03	.010"	0.229"	0.249"	250'	100'	WH,NT,YL,RD,BL,BK
2	0.263"	FGLG.02	.010"	0.258"	0.278"	250'	100'	WH,NT,YL,RD,BL,BK
1	0.294"	FGLG.01	.010"	0.289"	0.311"	100'	50'	WH,NT,YL,RD,BL,BK
0	0.330"	FGLG.00	.016"	0.325"	0.347"	100'	50'	WH,NT,YL,RD,BL,BK
3/8"	0.375"	FGL0.38	.016"	0.375"	0.399"	100'	50'	WH,NT,YL,RD,BL,BK
7/16"	0.438"	FGL0.44	.016"	0.438"	0.462"	100'	50'	WH,NT,YL,RD,BL,BK
1/2"	0.500"	FGL0.50	.016"	0.500"	0.524"	100'	50'	WH,NT,YL,RD,BL,BK
5/8"	0.625"	FGL0.63	.016"	0.625"	0.655"	100'	50'	WH,NT,YL,RD,BL,BK
3/4"	0.750"	FGL0.75	.016"	0.750"	0.786"	100'	50'	WH,NT,YL,RD,BL,BK

- UL Recognized: VW-1
- Rated To 464°F
- For High Temp - Low Voltage Applications
- Easy To Install-Cuts With Scissors
- Resists Most Organic Solvents
- Cut And Abrasion Resistant

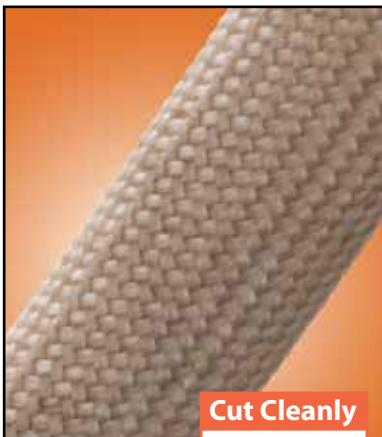

**Cut Cleanly  
Scissors**

**Material**  
Acrylic Coated Fiberglass

**Grade**  
FGL

**Wall Thickness**  
Refer to Chart

**Drawing Number**  
TF001INS-WD

**Put-Ups**


Nominal Size	Diameter	Part #	Wall Thickness	Expansion Range		Bulk Spool	Shop Spool	Available Colors
				Min.	Max.			
24	0.022"	FGLG.24	0.006"	0.020"	0.027"	500'	250'	6
22	0.027"	FGLG.22	0.006"	0.025"	0.032"	500'	250'	6
20	0.034"	FGLG.20	0.006"	0.032"	0.039"	500'	250'	6
18	0.042"	FGLG.18	0.006"	0.040"	0.049"	500'	250'	6
16	0.053"	FGLG.16	0.006"	0.051"	0.061"	500'	250'	6
14	0.066"	FGLG.14	0.006"	0.064"	0.072"	500'	250'	6
12	0.085"	FGLG.12	0.006"	0.081"	0.089"	250'	100'	6
11	0.095"	FGLG.11	0.008"	0.091"	0.101"	250'	100'	6
10	0.106"	FGLG.10	0.008"	0.102"	0.112"	250'	100'	6
9	0.118"	FGLG.09	0.008"	0.114"	0.124"	250'	100'	6
8	0.133"	FGLG.08	0.008"	0.129"	0.141"	250'	100'	6
7	0.148"	FGLG.07	0.008"	0.144"	0.158"	250'	100'	6
6	0.166"	FGLG.06	0.010"	0.162"	0.178"	250'	100'	6
5	0.186"	FGLG.05	0.010"	0.182"	0.198"	250'	100'	6
4	0.208"	FGLG.04	0.010"	0.204"	0.224"	250'	100'	6
3	0.234"	FGLG.03	0.010"	0.229"	0.249"	250'	100'	6
2	0.263"	FGLG.02	0.010"	0.258"	0.278"	250'	100'	6
1	0.294"	FGLG.01	0.010"	0.289"	0.311"	100'	50'	6
0	0.330"	FGLG.00	0.010"	0.325"	0.347"	100'	50'	6
3/8"	0.375"	FGL0.38	0.010"	0.375"	0.399"	100'	50'	6
7/16"	0.438"	FGL0.44	0.010"	0.438"	0.462"	100'	50'	6
1/2"	0.500"	FGL0.50	0.010"	0.500"	0.524"	100'	50'	6
5/8"	0.625"	FGL0.63	0.010"	0.625"	0.655"	100'	50'	6
3/4"	0.750"	FGL0.75	0.010"	0.750"	0.786"	100'	50'	6

**Heat Treated, Fray-Resistant  
Fiberglass Sleeving**

Techflex INSULTHERM TRU-FIT (FGL) is a braided fiberglass sleeving which has been heat treated and impregnated with an acrylic binder to reduce fraying and dusting, and improve usability and performance. FGL is engineered for applications where temperatures as high as 1,200°F may be encountered. FGL is used as primary insulation on low voltage applications such as leads in toasters, coffee makers, ranges and other appliances. FGL may also be used as insulation and protection for small heaters and resistors that operate at high temperatures, and to insulate over soldered connections when exposure to solder melt temperatures is possible.

Insultherm Tru-Fit provides a sturdy, long lasting and inexpensive insulation solution. It is flexible and expandable, and can easily be installed over applications with irregular shapes and tight turns. Standard color are Black and Natural, but other colors are available by special order. Contact your Account representative for details.


**Colors Available:**  
6 = WH, NT, YL  
RD, BL, BK

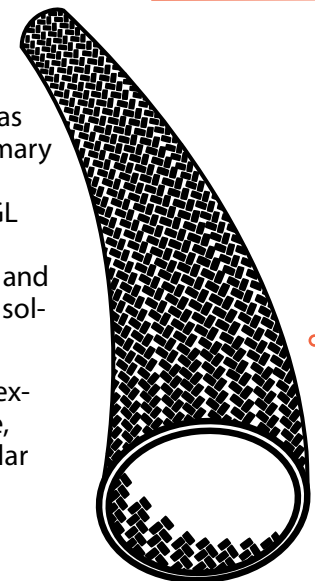

Colors Available:



White (WH), Natural (NT), Yellow (YL), Red (RD), Blue (BL), Black (BK).

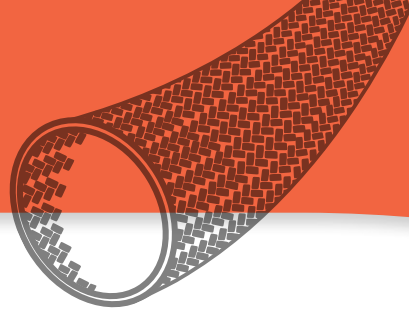

## **ABRASION** **FLAMMABILITY**

**Abrasion Resistance**  
**Medium**

Rating \_\_\_\_\_ UL VW-1

**Abrasion Test Machine**  
**Taber 5150**

**Abrasion Test Wheel**  
**Calibrase H-18**

**Abrasion Test Load**  
**500g**

## **CHEMICAL RESISTANCE**


1=No Effect    4=More Affected  
2=Little Effect    5=Severely Affected  
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	1
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	2
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	2
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

**Melt Point**  
*ASTM D-2117*  
**2,048°F (1,120°C)**

**Maximum Continuous**  
*Mil-I-23053*  
**1,202°F (650°C)**

**Minimum Continuous**  
**-94°F (-70°C)**

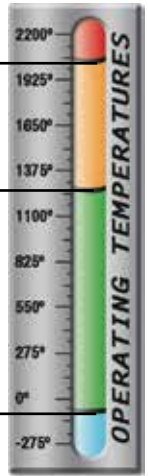

## **PHYSICAL PROPERTIES**

Monofilament Diameter _____	NA
<i>ASTM D-204</i>	
Flammability Rating _____	VW-1
<i>FMVSS-302 Approved</i>	
Recommended Cutting _____	Scissor
Colors _____	2
Wall Thickness _____	.006-.016
Specific Gravity <i>ASTM D-792</i> _____	1.0-1.8
Moisture Absorption _____	.01
<i>% ASTM D-570</i>	
Hard Vacuum Data _____	
<i>ASTM E-595</i>	
TML _____	.02
CVCM _____	.01
WVR _____	.00
Outgassing _____	Low

www.techflex.com