


Self-closing braided wrap




Application

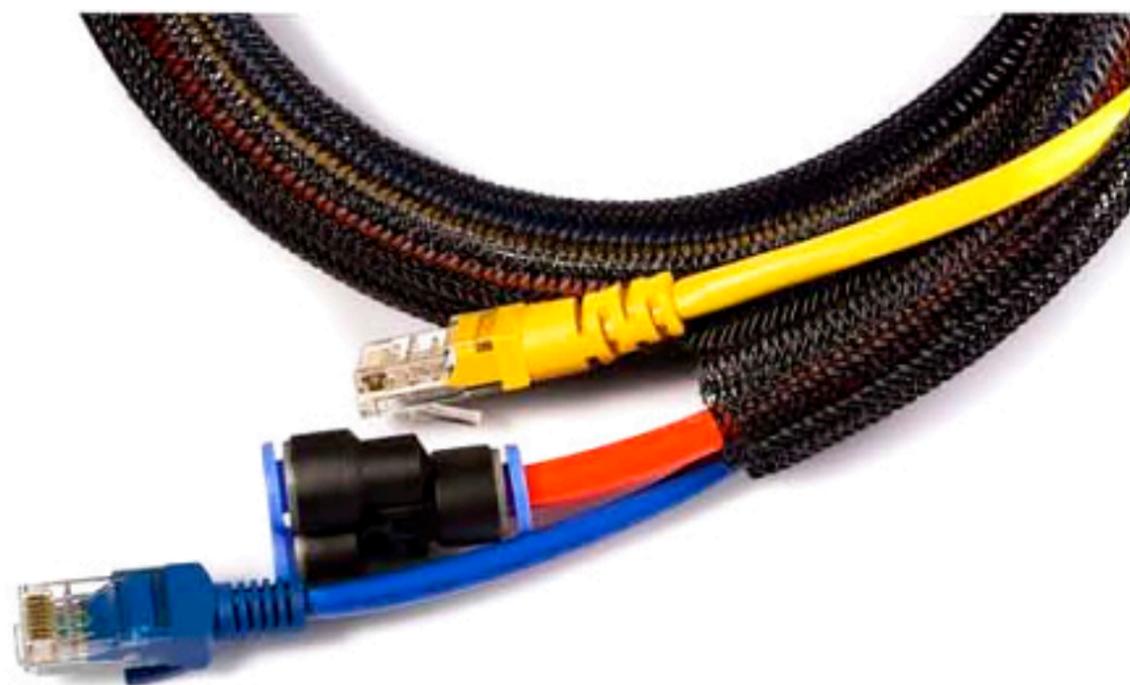

Its ideal for application in wire harness, automatic equipment, railways, general manufacturing industry where wires and tubes need a tough and durable protection.

JDD-SCW self-closing wrap offers innovative solutions for the protection of breakout areas and provides easy removal when is necessary an inspection or maintenance of cables. The special open structure allows to be installed after other components, for example copper terminals and connectors. A strong resilience protects wires and cables and meanwhile provides exceptional abrasion and flame resistance.

Drawing

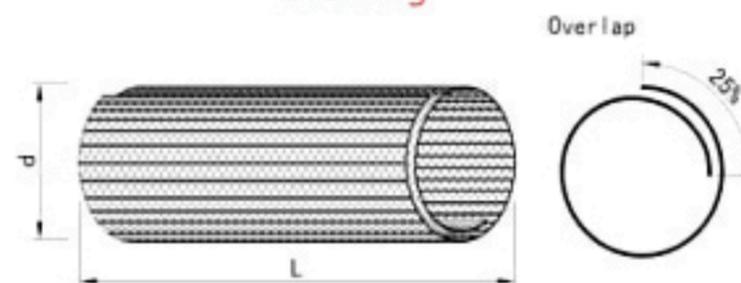

Datasheet				
Part No.	I.D (d)	Overlap (%)	Max. bundle Dia.	Packing(L)
SCW-003	3	25%	4	200 m/spool
SCW-006	6		7	200 m/spool
SCW-009	9		10	100 m/spool
SCW-013	13		14	50 m/spool
SCW-019	19		20	25 m/spool
SCW-025	25		26	25 m/spool
SCW-032	32		33	25 m/spool
SCW-038	38		40	25 m/spool
SCW-050	50		52	25 m/spool

Unit: mm



Technical data	
Material	Polyester
Operating range	-50°C-+150°C
Melt point	250±5°C
Flammability	VW-1
Standard color	Black
Certificate	RoHS, Halogen Free
Cutting tool	Hot knife

Notes:

1. The part No. will be followed by BK, GR and so on to indicate the color of wrap.
2. Special packages, sizes and colors can be supplied upon request.
3. All numeric data shows average or typical values, not including customized sizes.